




LG G Watch R Battery Replacement Replacement

This guide will help you replace the watch's battery should you ever need a new power source.

Written By: Westley Courchene

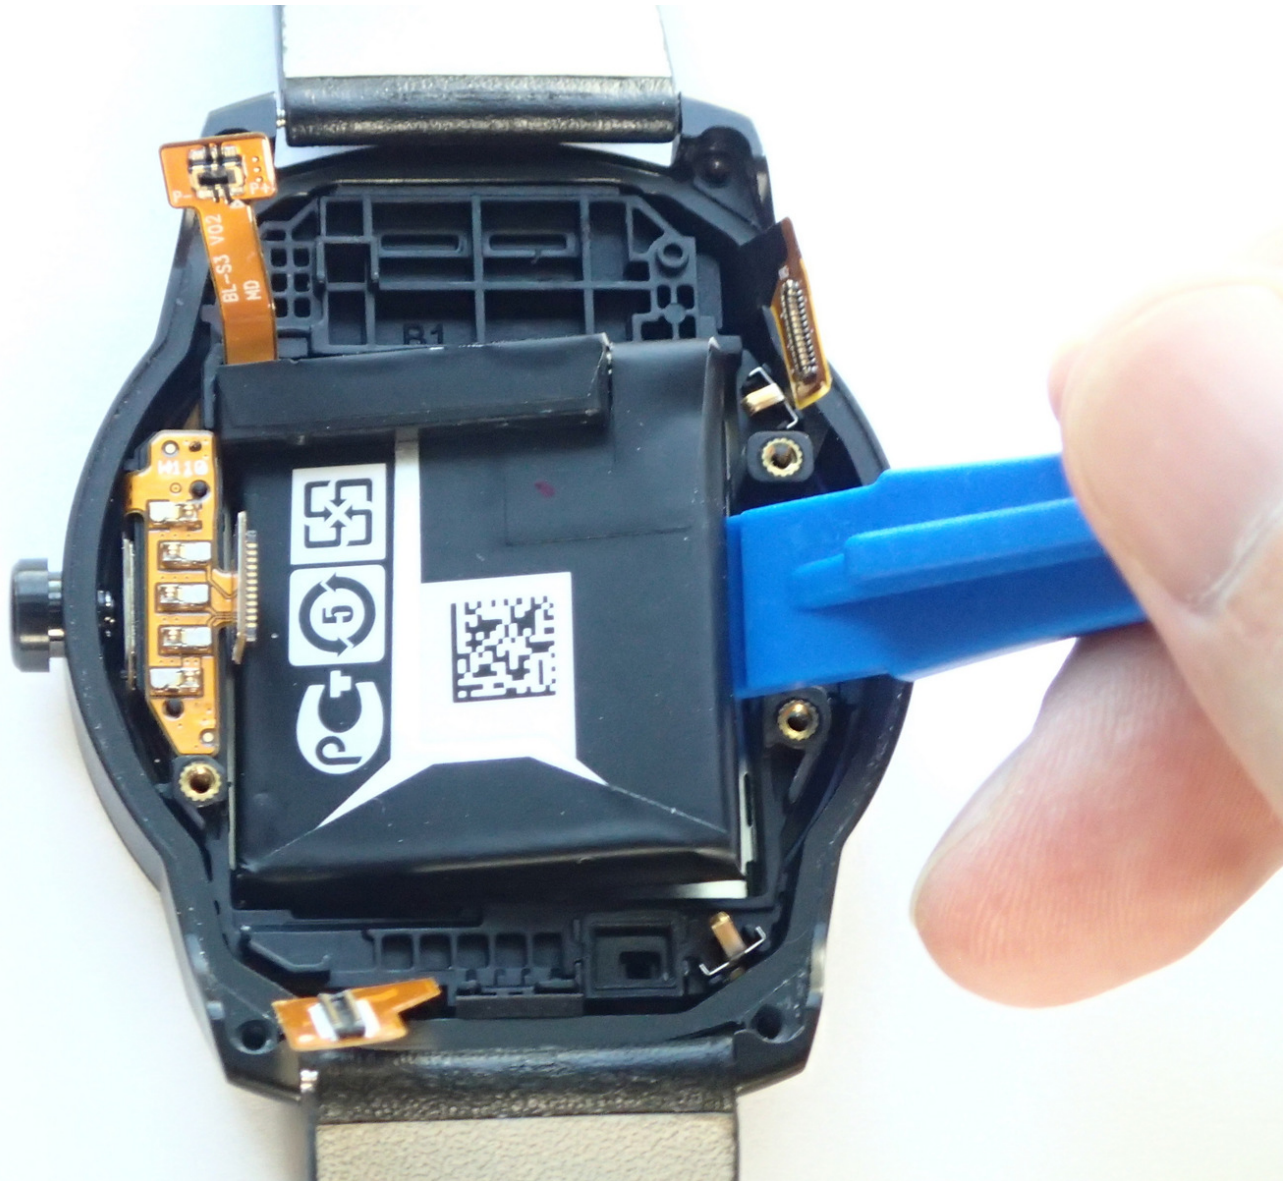

INTRODUCTION

The battery can be used to hold a charge that powers the watch for a period of time.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Case



⚠ Power off your watch before disassembling it.

- Place the watch upside down on a hard surface so that its back case is facing upright.
- Use a T5 Torx Star screwdriver to remove the four 4.0 mm Torx screws from the corners of the back case.

Step 2





- Use a plastic opening tool to pry open the back case from both sides of the watch.

Step 3




- Remove the back case.

Step 4 — Motherboard

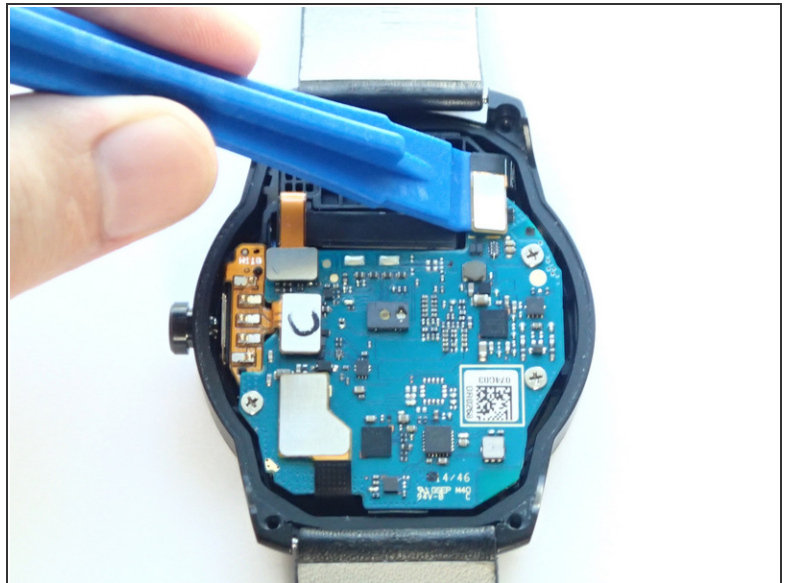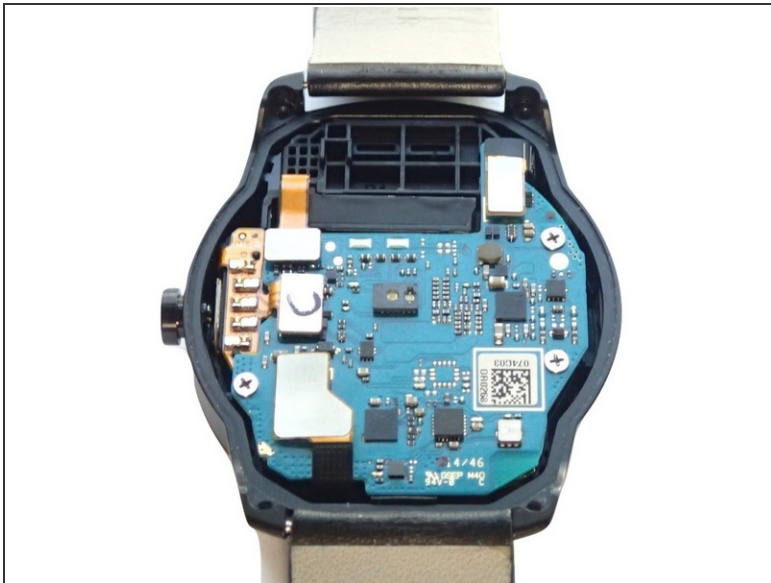


- With a plastic opening tool, disconnect the four connectors on the top of the motherboard.

Step 5

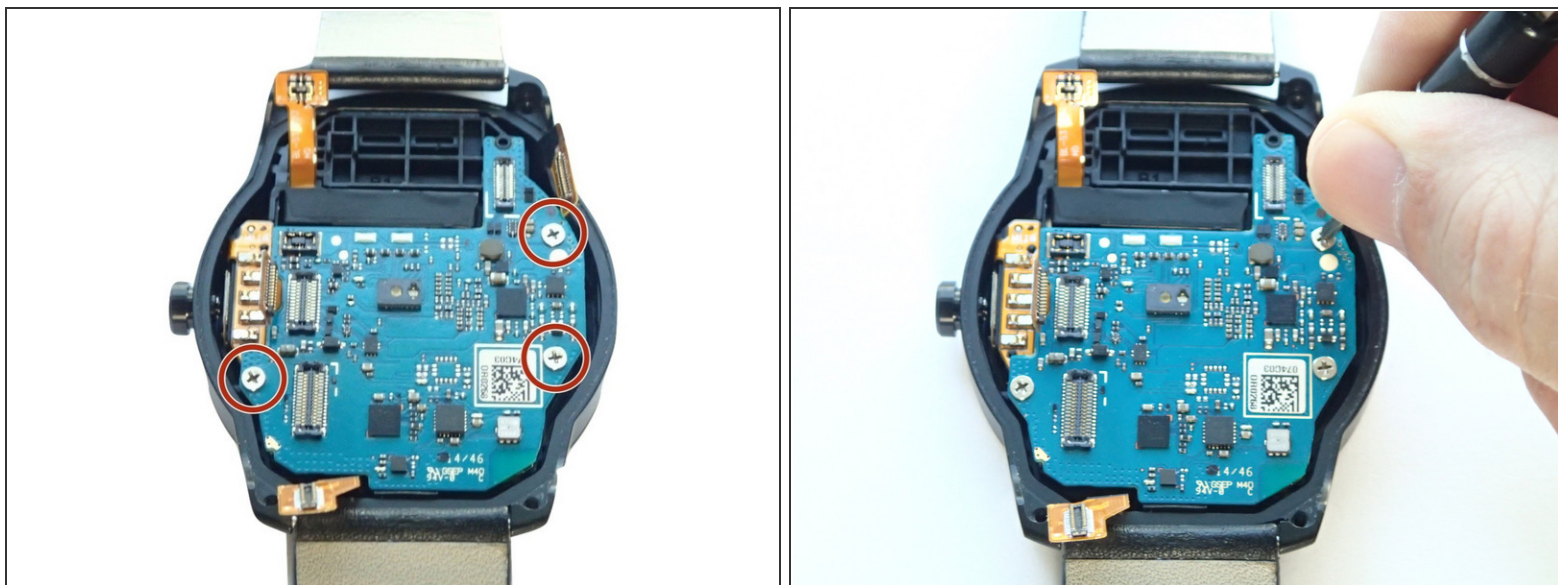


- Remove three 3.0 mm Phillips screws on the edges of the motherboard with a Phillips #000 screwdriver.

Step 6

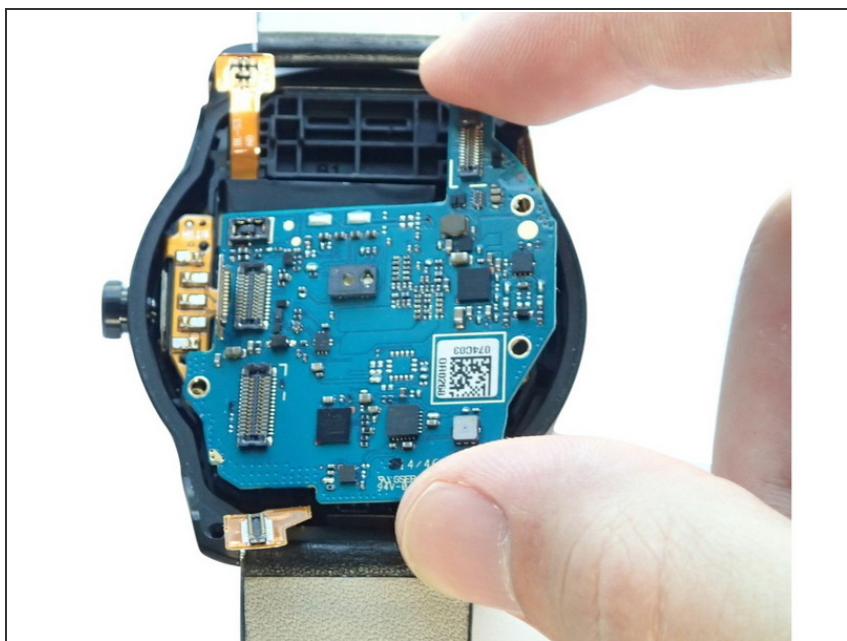

- Grasp the edges of the motherboard and slide it slightly towards the right to remove it from its case.

Step 7 — Battery Replacement

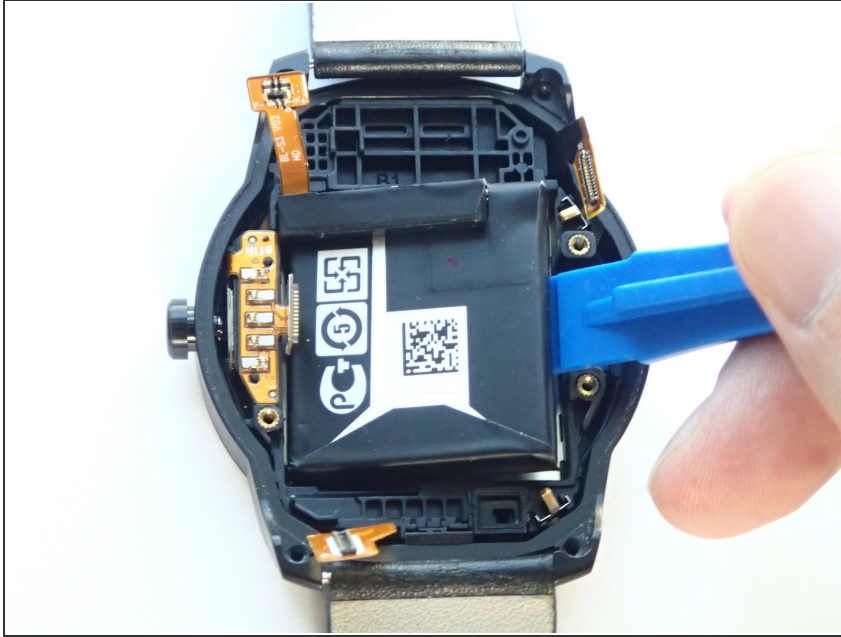

- Use a plastic opening tool to pry the battery out of the device.
- ⓘ You may need to use a stronger prying force due to the adhesive that secures the battery to the case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-16 04:35:03 PM.